
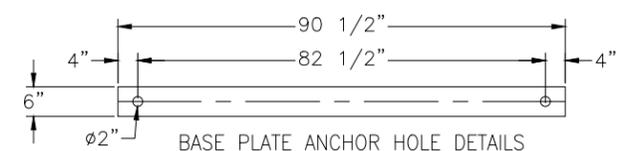
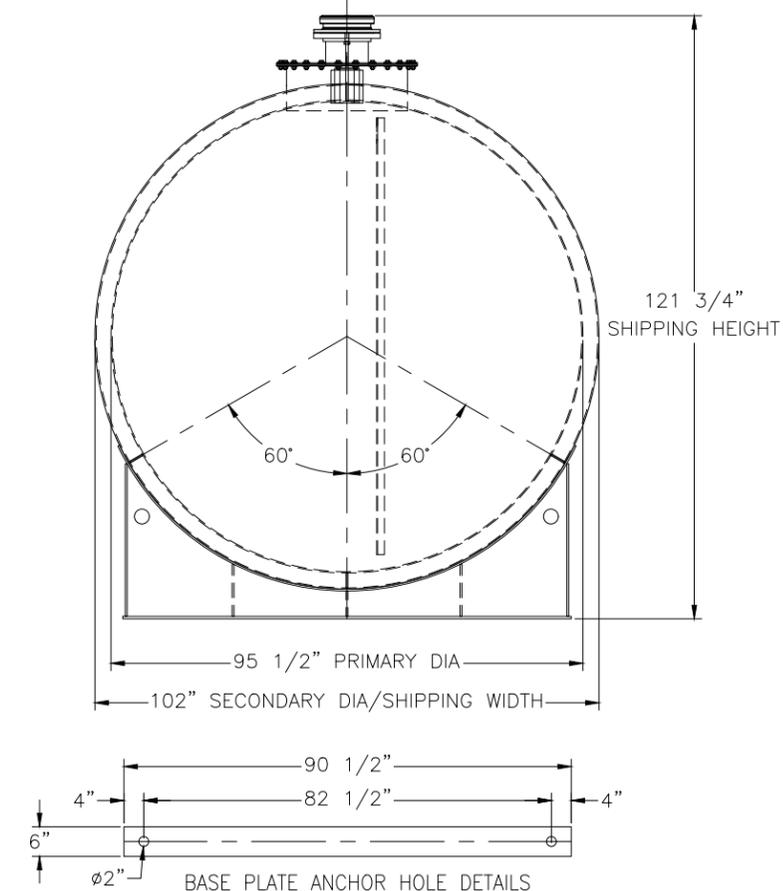


Parts List

ITEM	QTY	SIZE	RATING	TYPE	MATERIAL	PROJ. OUT	FUNCTION	ITEM	QTY	SIZE	RATING	TYPE	MATERIAL	PROJ. OUT	FUNCTION
A	1	2"	FNPT	COUPLING	C.S	-	INTERSTITIAL MONITOR PIPE	H	1	8"	150#	RFSD	C.S	-	PRIMARY E-VENT W/MORRISON 2440 DR EQUAL
B	4	2"	FNPT	FITTING	C.S	-	PERLITE FILL/INSPECTION	I	1	24"	-	-	C.S	7"	24" STANDARD MANWAY
C	1	4"	FNPT	FIREGUARD COUPLING	C.S	6 1/2"	SUPPLY	J	1	4"	FNPT	FIREGUARD COUPLING	C.S	6 1/2"	PROBE
D	1	4"	FNPT	FIREGUARD COUPLING	C.S	6 1/2"	RETURN	K	1	4"	FNPT	FIREGUARD COUPLING	C.S	6 1/2"	GAUGE
E	1	3"	FNPT	FIREGUARD COUPLING	C.S	6 1/2"	NORMAL VENT	L	1	6"	MNPT	PIPE NIPPLE	C.S	6 1/2"	FILL
F	4	-	-	-	C.S	-	LIFTING LUG	M	1	2"	FNPT	FIREGUARD COUPLING	C.S	6 1/2"	GAUGE STICK
G	1	8"	150#	RFSD	C.S	6"	SECONDARY E-VENT W/MORRISON 2440 DR EQUAL	N	2	-	-	-	C.S	-	C4 X 5.4# CHANNEL

ALL DIMENSIONS ARE FROM THE PRIMARY TANK W/ EXCEPTION OF SECONDARY E-VENT & MONITOR PIPE

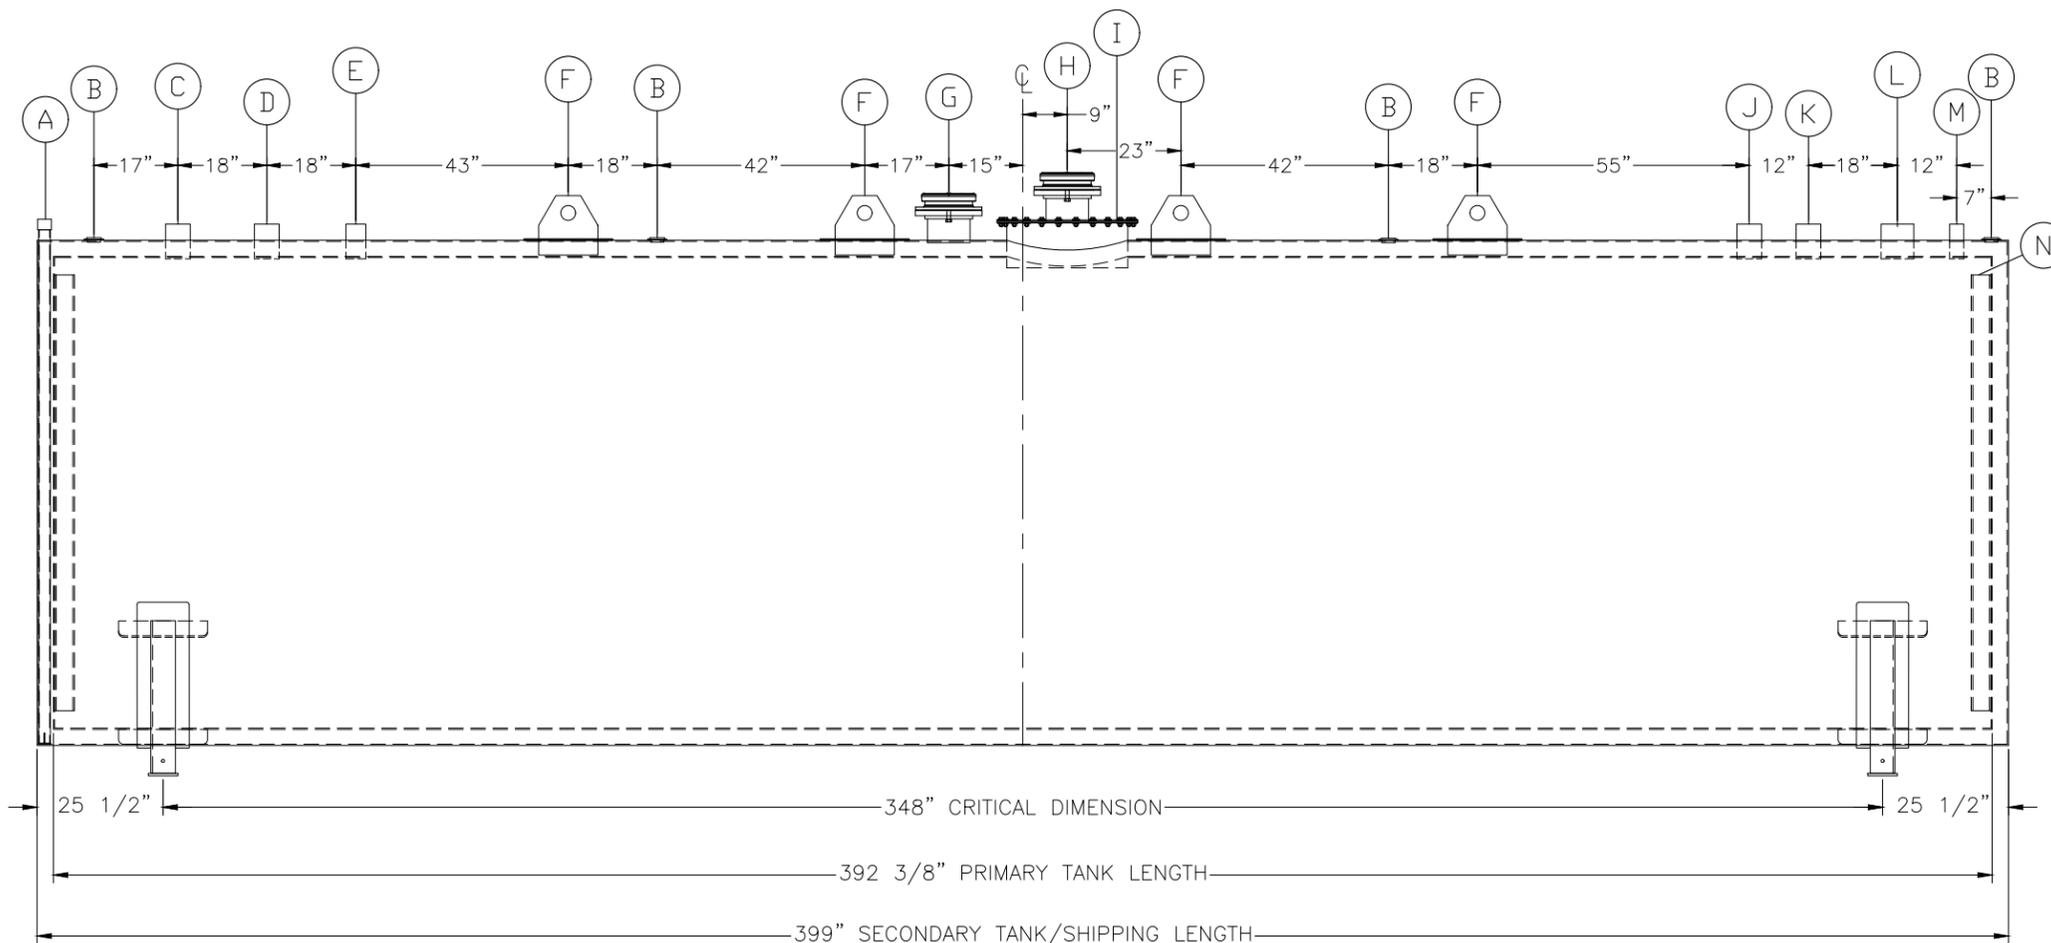

CUSTOMER APPROVAL SIGNATURE/DATE:

12,000 GALLON THERMALLY INSULATED (FIREGUARD) STORAGE TANK




DESIGN DATA	
OPERATING PRESSURE: ATMOSPHERIC	JOINT DESIGN: LAP WELD
SPECIFIC GRAVITY: 1.0	ALL LINEAR DIMENSIONS SHALL BE ±1/4" AND ANGULAR DIMENSIONS WITHIN ±1°
TANK MATERIAL: ASTM A36 CARBON STEEL	INTERIOR SURFACES: SSPC-SP-3 (POWER TOOL CLEAN) & REMOVE LOOSE DEBRIS
PRIMARY SHELL: 1/4" PRIMARY HEADS: 1/4" SECONDARY SHELL: 1/4" SECONDARY HEADS: 5/16"	EXTERIOR SURFACES: SSPC-SP-6 COMMERCIAL BLAST CLEANING & ONE COAT OF WHITE URETHANE @ 5-7 MILS DFT
	LABEL/MARKING: UNDERWRITERS LABORATORIES UL-2085/ STEEL TANK INSTITUTE FIREGUARD

CUSTOMER: CUSTOMER
PROJECT: PROJECT
AGENT: AGENT



P.O. BOX 1279 GOLDSBORO, NC 27533
PHONE: (919)751-1791 FAX: (919)751-8186
DRAWING NUMBER: GIF12K102SAD DESIGNER: 2.21.2024

QUANTITY: ONE (1) REQUIRED
WEIGHT: W/O PERLITE 22,740 lbs ± 10%
WEIGHT: W/PERLITE 32,820 lbs ± 10%

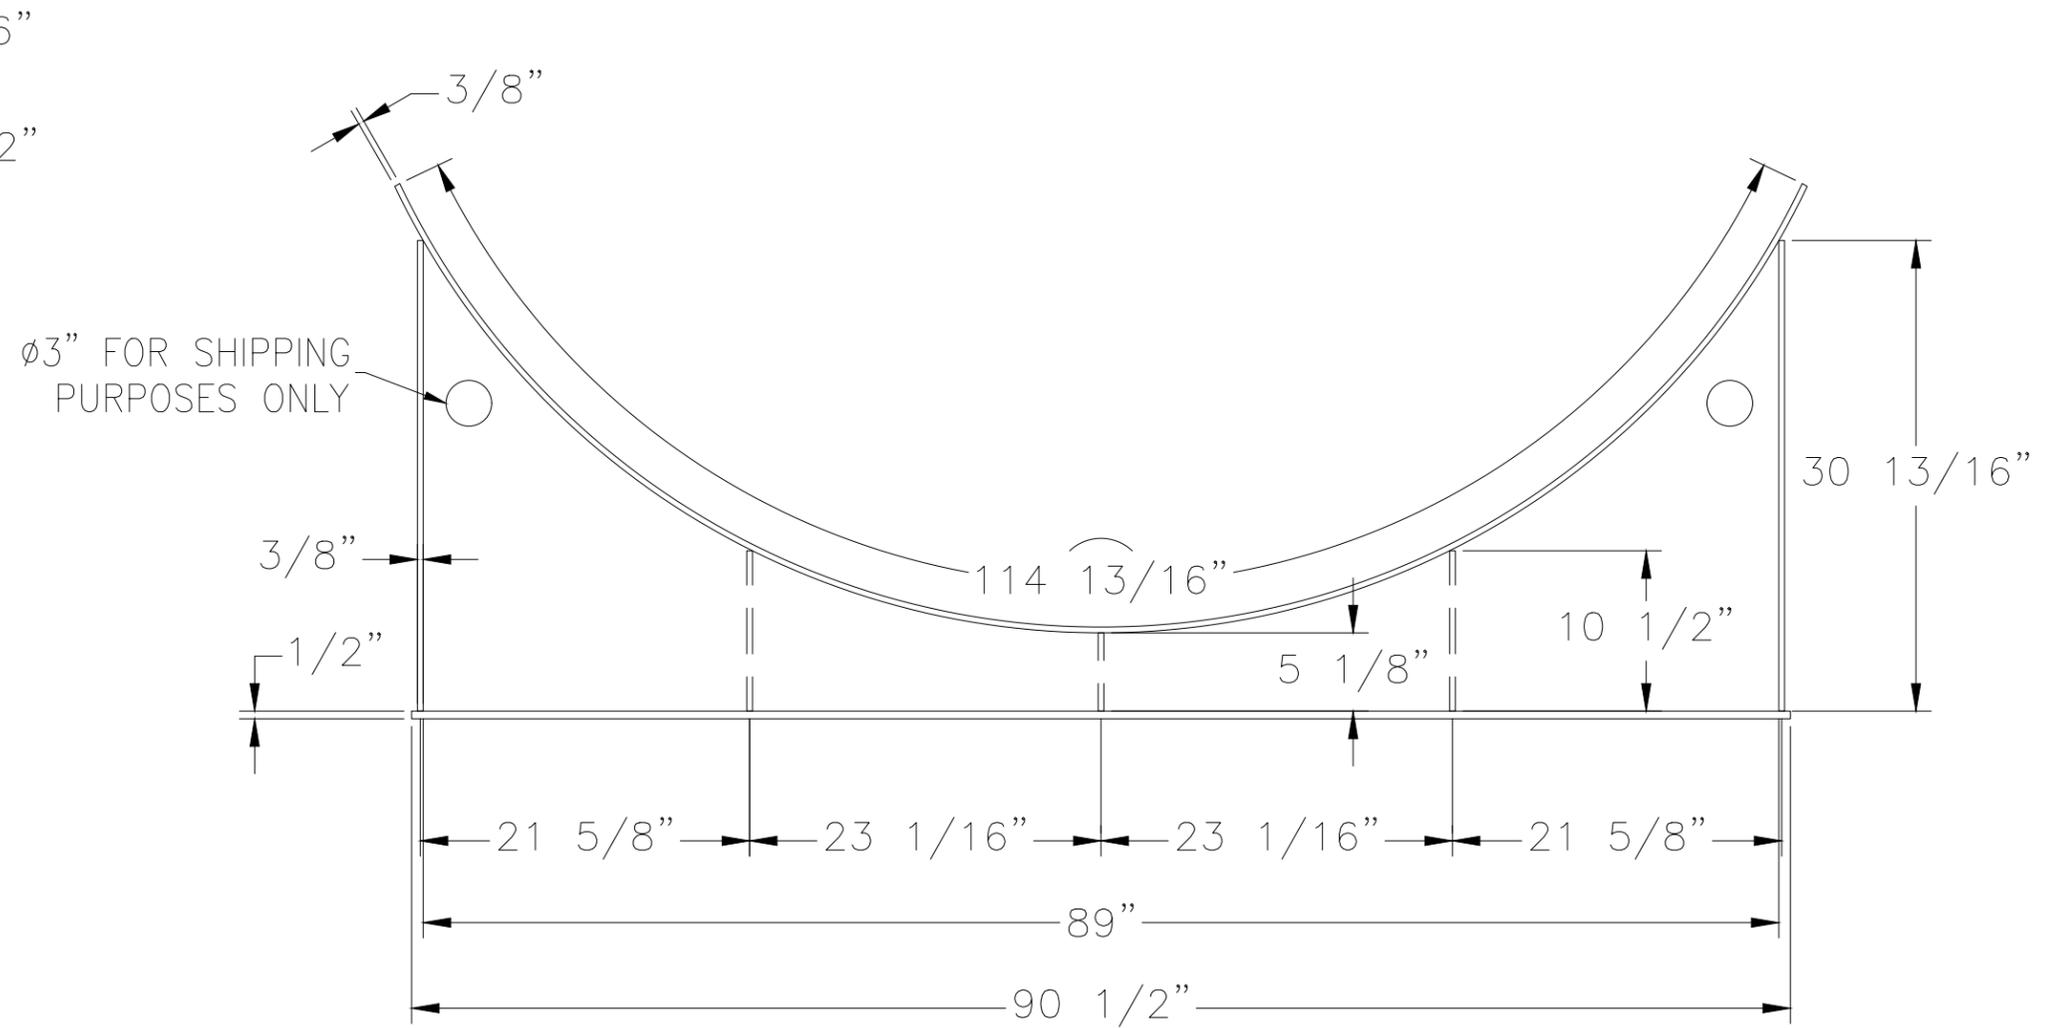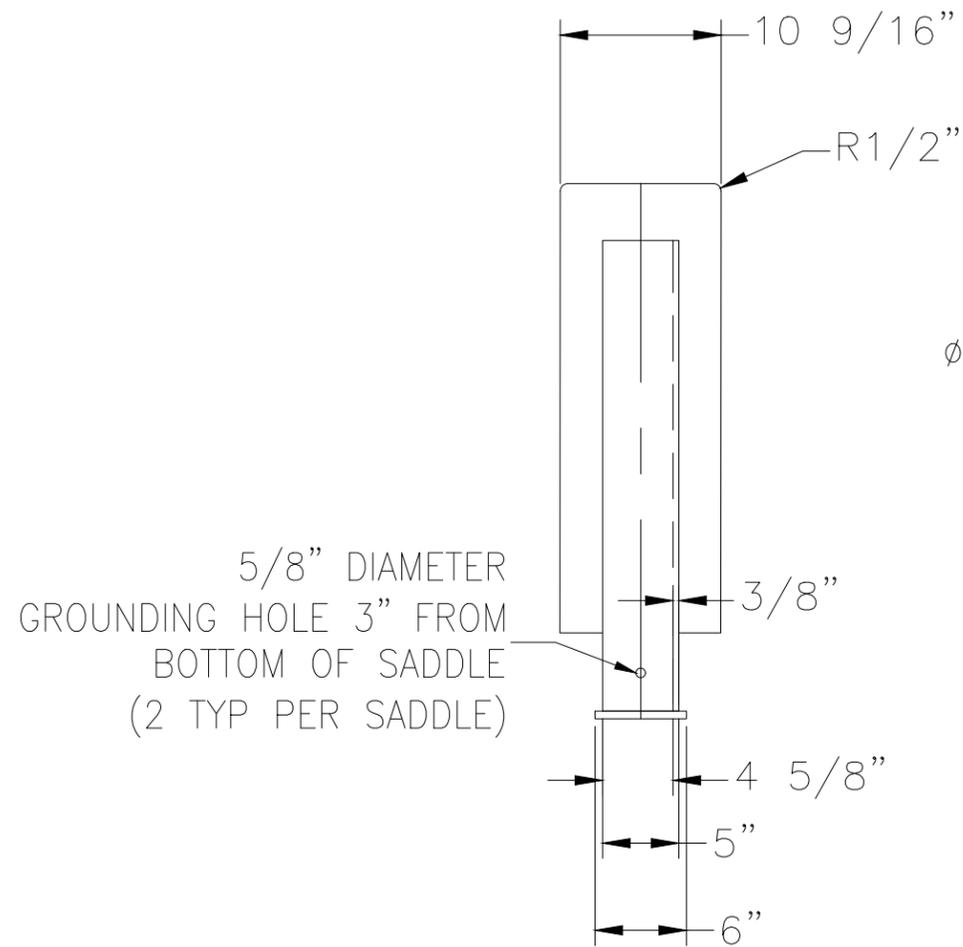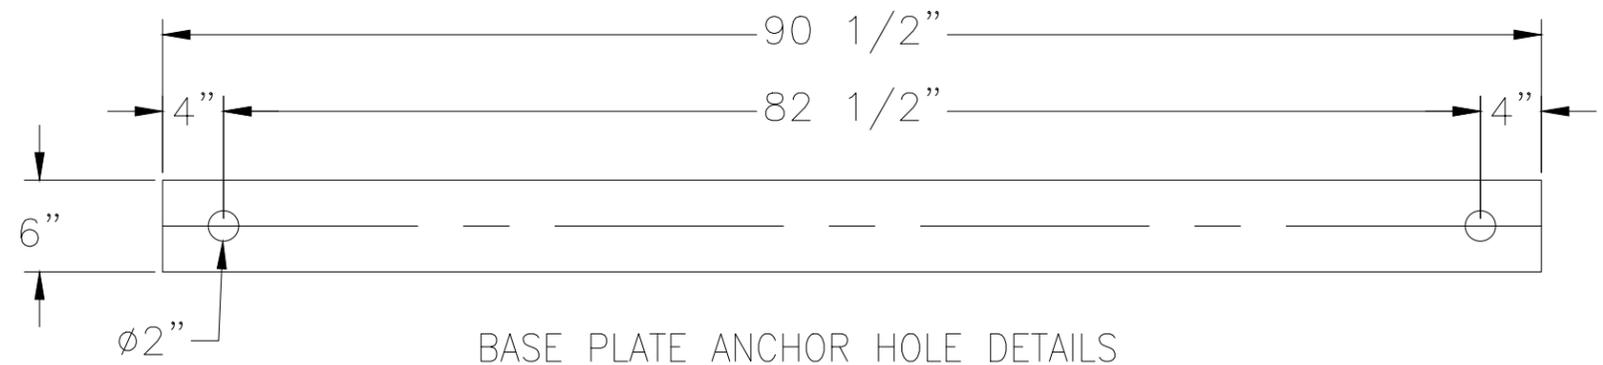

CUSTOMER APPROVAL SIGNATURE/DATE:

12,000 GAL 6" TALL SADDLE FOR 102" DIAMETER TANK

DESIGN DATA

MATERIAL - ASTM A 36 CARBON STEEL

EXTERIOR SURFACES: SSPC-SP-6 COMMERCIAL BLAST ONE COAT WHITE URETHANE
@5-7mils DFT

CUSTOMER: CUSTOMER

PROJECT: PROJECT

AGENT: AGENT

GENERAL INDUSTRIES

P.O. BOX 1279 GOLDSBORO, NC 27533
PHONE: (919)751-1791 FAX: (919)751-8186

DRAWING NUMBER:
GIF12K102SAD/1

DESIGNER
2.21.2024

QUANTITY: TWO (2) REQUIRED
WEIGHT: 368 lbs \pm 10%